



Double Spillway Bowl Fountain Kit Installation Manual



Blue Thumb

For use with Brass Kit #ABBDB4K



Thank you for choosing our Brass Patina Double Spillway Fountain Kit. This kit comes complete with everything you need for an easy installation.

Please read carefully and when directed please reference specific product manuals for detailed product installation guidance, and you'll have your fountain up and running in no time!

Included in your Spillway Kit:

- 34" Dia. Brass Patina Spouted Spillway Bowl, with a 12"H Matching Pedestal
- 40" Dia. Brass Patina Spillover Bowl
- 52" AquaBox® Altum Basin with pre-drilled Grate for easy installation
- 3,200 gph IllumiFlow® Pump
- 2-way manifold to feed both bowls
- Two 1" Kink-free Hoses with plumbing connectors
- 5 bags Polished Pebbles
- Plastic Shims



STEP 1

Choose Basin Location

Locate your fountain near your preferred viewing area where both water and electricity services are accessible.

Clear the area and prepare to excavate by tracing the fountain basin using marking paint.

Be certain to avoid underground utilities. If uncertain call your utility company or Miss Dig.

STEP 2

Excavation of Basin Area

Using a shovel dig 90 degrees into the ground, slightly wider and just as deep as the fountain basin making sure to remove any sharp rocks or roots.

Tamp to compact soil under the basin to reduce settling issues later.

Check to make sure the round is level in all directions.



STEP 3

Position Basin and Backfill

Place the basin within the hole. Make sure the pump opening in the grate is orientated near electrical service. Using a 2-4 ft. level ensure the fountain basin remains level side to side.

Once the fountain basin is level, carefully backfill using excavated soil. Tamping the soil tightly around the basin to prevent shifting.

Consider adding water to the basin at this time to complete the stabilization of the basin and save time during the installation process.



STEP 4

Determine Fountain Placement

Consider placement of the fountains. Make sure the fountains flow in the direction for best viewing, while providing easy access to an electric source for both the pump access in the grate, and the auto-fill spinweld located on the side of the basin.

You are able to move the grates to adjust pump access, and bowl positioning after the basin has been installed, but not the spinweld location.

The large bowl will need to be completely on the basin to catch water overflow. There is a large drilled hole in a grate near the center of the basin to fit the plumbing assembly through.

The smaller bowl on a pedestal will sit on the edge of a corner with its spout over the more centered large spillover bowl. There will be a mark on the grate where the 1" hose will easily slide down.

34" Dia. Spouted Spillway Bowl on 12"H Base

40" Dia. Spillover Bowl (without spout) sits on basin



Optional Auto Fill Kit Install

If a Blue Thumb Elite Auto Fill Kit is being incorporated, you may bury your water supply line and make any Auto Fill connections at this time.



Kit Item: #ABDAUTO



STEP 5

Fountain Plumbing

The Smaller Bowl: Attach 1½" intake connector assembly to the inlet in the center of the bottom of the 34" Spillway Bowl. The second inlet is capped with a threaded plug inside the vessel. It may be used for internal lighting, if desired.

Attach hose to the intake connector assembly centered on the 34" spillway bowl.

Feed the other end of the hose through the 12" base that the 34" bowl will sit on, then through the hole marked for reference in the grate, and into the reservoir/basin.

Set the 34" bowl on the pedestal, making sure the hose continues to feed into the basin and has no kinks or twists, which will cause a reduction in water flow, and possibly no flow at all.



The Larger Bowl: Attach 1½" intake connector assembly to the inlet in the center of the 40" bowl, the attach the hose to that intake assembly. Since this large bowl sits directly on the basin grate, a hole has been drilled so the intake connection doesn't tip the fountain bowl. Feed the other end of the hose through the hole in the grate, and allow the protruding intake assembly to sit with in the drilled hole.

Reach in the basin and pull the hoses so they are easily reachable from the pump access.



STEP 6

Attach Manifold to Pump

The pump will send water to both bowls through a double manifold, which can be adjusted by turning the red flow control valves. Attach the manifold to the pump. Now slide through the pump access, turn hose connectors toward the center or the basin and attach the hoses to the manifold discharge assembly.



STEP 7

Pump Set-up

The fountain pump will be located beneath the pump access panel and inside the fountain basin. Keep the pump positioned as close to the pump access opening as possible for best accessibility. This pump can be installed on its side, it will run in either position.

Keep power cord outside the basin and away from water. The power cord will pass through the notch on the pump access cover.



STEP 8

Place and Level Fountains

Place fountain bowls so the 34" bowl spillway flows completely into the 40" spillway bowl. Splash should be kept to a minimum to avoid excessive refilling.

Level the spillway bowls to help direct water flow. It is most important to level the Large Bowl, so the spillover is even all around the bowl.

Add plastic shims where needed to adjust leveling and flow.



STEP 9

Fill and Test

If you haven't already added water to the fountain basin, use a garden hose to add water until the basin is filled to the bottom of the grates.

With your Spillway Bowls in place, fill your Spillway Bowls with your garden hose.

Our optional Auto Fill Kit, shown before Step 5, may be used to keep the water level topped off with minimal maintenance checks.

Plug in the pump cord to test your fountain. Adjust water flow by adjusting the red flow control valves, shown on the double manifold.



NOTE: Normal evaporation is about 1-2" weekly, however, that is dependent on your region. Many factors including humidity, rainfall, wind, and splash will determine exactly how frequently you need to refill.

Finishing

Select decorative gravel that compliments your fountain, adjacent landscape and is sized appropriately to not fall through the cracks of the grates into the fountain basin.

For the best look, consider adding plants and moisture loving ground covers around the footprint of the fountain basin, or adding a lighting kit.

ENJOY!

Grab your favorite beverage, sit back, relax, and enjoy your new fountain!




Kit Tips:

- Plumber's tape or silicone (not included) can be used to provide a watertight connection.
- These bowls have a patina finish that will naturally evolve in coloration. The finish requires no maintenance, but upon occasion you may want to clean it with detergent and a soft cloth, do not use an abrasive.
- These Spillways are designed to produce a vertical sheer with little projection. The spillway lip should protrude far enough over the catch basin to keep the water within the system's flow.

Lighting Options

Internal Lighting Add-on

Patina Spillway Bowls feature dual inlets in the base of the spillway bowls. The center one is typically used for as a water inlet, the off-center can be capped or used for lighting with a proper watertight light assembly.

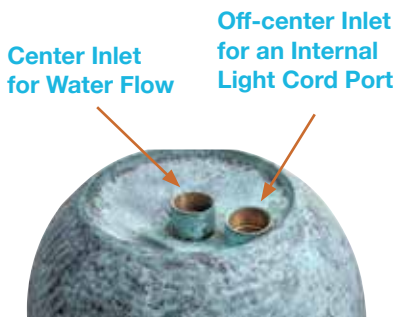

Overview of Optional Ring Lighting Install Item# PBRING + Item# PBSGSP



A On the inside of the bowl, drop the four-pin end of the light's power cord through the off-center inlet.



C Secure the plug in the inlet by screwing the plug into the inlet, making sure the cord stays in place in the plug notch.



D The Ring Light will fit over the threaded stand pipe that will screw into the center inlet.



E Push the Ring Light to the bottom of the stand pipe

B Set the Ring Light cord into the cord notch on the threaded Plug. Push it to the top of the notch.

See light kits for detailed instructions.

External Up-lighting Add-on

Our IllumiGlow® Fountain 3 Light Kit will bring your display center stage by illuminating the water flowing from the spillway in a warm white light, for a dramatic but soothing evening show.



Kit Item: #PB2897



Color-Changing
Ring Lights
#PBRING



Auto Fill Kit
#ABDAUTO



Muck Buster®
#PB2682



Algae D-Solv®
#PB2002

Maintenance

General Fountain and System Maintenance

- It is OK to run pump continuously 24/7, or you may choose to connect it to a timer.
- Regularly check the water level in the basin. Never allow the water to drop below the pump, as this can lead to pump failure.
- Fill evaporated water as necessary or consider installing an Auto Fill Kit #ABDAUTO.
- Add Muck Buster® #PB2682 every couple of weeks to the basin to ensure muck doesn't build-up over time and clog the pump. 3 tablets treat 500 gallons of water.
- If algae forms on your Spillway Bowls, use CrystalClear® Algae D-Solv® #PB2002 to quickly clear organic debris and remove odors. 1 ounce treats 360 gallons. You may also use a soft bristle brush to clean algae off of the bowls.

Winterizing:

- If you live in a climate that experiences prolonged freezing conditions, we recommend removing the pump from the basin. Place the pump in a bucket of water and store it in a place that will not freeze.
- **Do not drain the basin during the winter months** - allow the water to freeze in the basin so that the ground doesn't cause the basin to rise or "pop up" from expansion of the freezing soil around it. Leave basin 50% full of water.
- Our Brass Spillway Bowls should be drained and protected to prevent freeze damage during winter months. They may be removed and stored, or covered with a patio furniture cover, to prevent re-filling from rain or snow melt.

Spring Start-Up:

- Once everything has thawed in the spring we recommend draining the water in the basin and replacing it with fresh, clean water. A wet/dry vacuum works well for removing water and accumulated debris.
- Reconnect the pump and plug it in.
- Add Muck Buster® to remove any remaining muck that was not able to be removed manually.

If you need replacement parts please contact us directly at **888-619-3474** or email us at **sales@bluethumbponds.com**.

Now, snap a picture of your completed waterfall and post it to our Facebook page at facebook.com/bluethumbinc!

www.shopbluethumb.com

